

# SMD Tactile Switch

## B3FS-4000

### Surface-mounting Switches with 12 × 12 mm size

- Surface-mounting device of B3F-4000 series.
- Distinctive snapping action and extended mechanical/electrical durability.
- Available in embossed taping packages for automatic mounting.
- Type B32 Key Tops are available for projected plunger models.

RoHS Compliant



### ■ Ordering Information

#### ● List of Models

Type	Plunger type	Height	Operating force (OF)	Plunger color	Embossed taping	
					Model	Quantity per package
12 × 12 mm B3FS-4002P		4.3 mm	1.47 N	Black	B3FS-4002P	1,000
12 × 12 mm B3FS-4005P			2.55 N		B3FS-4005P <i>NEW</i>	
12 × 12 mm B3FS-4052P		7.3 mm	1.47 N		B3FS-4052P <i>NEW</i>	500
12 × 12 mm B3FS-4055P			2.55 N		B3FS-4055P <i>NEW</i>	

Note: Order in multiples of the minimum order unit. Switches are not sold individually.

### ■ Specifications

#### ● Ratings/Characteristics

Switching capacity	1 to 50 mA, 5 to 24 VDC (resistive load)
Minimum applicable load (reference value)	10 µA at 1 VDC (resistive load)
Ambient operating temperature	-25 to +70 degC at 60%RH max. (with no icing or condensation)
Ambient operating humidity	35 to 85%RH (at -5 to +35 degC)
Contact configuration	SPST-NO
Contact resistance	100 mΩ max. (initial value) (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ (at 250 VDC)
Dielectric strength	500 VAC 50/60 Hz for 1 min
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Destruction: 1,000 m/s <sup>2</sup> {approx. 100 G} max. Malfunction: 100 m/s <sup>2</sup> {approx. 10 G} max.
Durability	3,000,000 operations min. (OF: 1.47 N {150 gf}) 1,000,000 operations min. (OF: 2.55 N {260 gf})
Weight	Approx. 1 g

#### ● Operating Characteristics

Item	Model	B3FS-4002P	B3FS-4052P	B3FS-4005P	B3FS-4055P
Operating force (OF)	1.47±0.49 N {150±50 gf}		2.55±0.69 N {260±70 gf}		
Releasing force (RF)		0.15 N {15 gf} min.		0.29 N {30 gf} min.	
Pretravel (PT)		0.25±0.15 mm		0.25±0.15 mm	

## Dimensions


**Note: 1.** All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions.

**Note: 2.** The numbers used for terminals in the following graphics are indicated in the "Bottom View" diagram in the right. In this diagram, the Switch is rotated so that the terminals are on the right and left-hand sides, and the OMRON logo appears the right way up.




### Flat type


**B3FS-4002P**  
**B3FS-4005P**

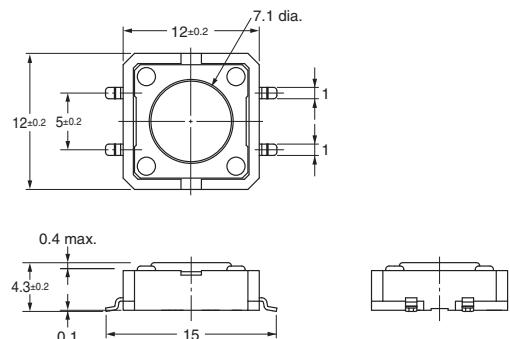

PCB Pad (Example)  
(TOP VIEW)

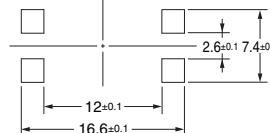


Terminal Arrangement/  
Internal Connection  
(Top View)




### Projected type


**B3FS-4052P**  
**B3FS-4055P**

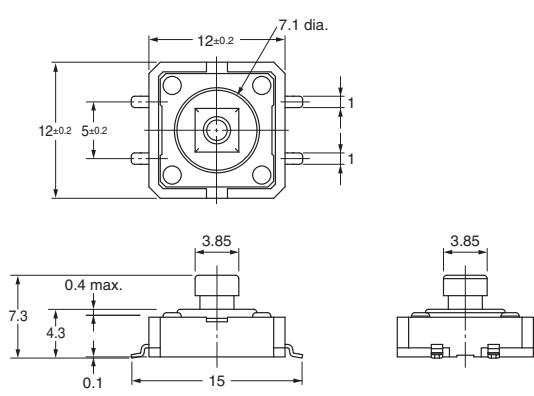

PCB Pad (Example)  
(TOP VIEW)

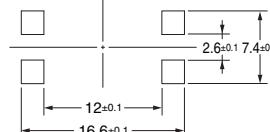

Terminal Arrangement/  
Internal Connection  
(Top View)



## ■ Precautions

Be sure to read the safety precautions common to all Tactile Switches for correct use.

### Precautions for Correct Use

#### ● PCBs

If the PCBs are separated after mounting the Switch, particles from the PCBs may enter the Switch. If PCB particles or foreign particles from the surrounding environment, workbench, containers, or stacked PCBs become attached to the Switch, contact failure may result.

#### ● Soldering


##### 1. General Precautions

Before soldering the Switch on a multilayer PCB, test to confirm that soldering can be performed properly. Otherwise the Switch may be deformed by the soldering heat on the pattern or lands of the multilayer PCB.

Do not solder the Switch more than twice, including rectification soldering. An interval of five minutes is required between the first and the second soldering, or it may result in melting housing and deterioration of operating characteristics.

##### 2. Reflow Soldering (Surface Mounting)

Solder the terminals within the heating curve shown in the following diagram.

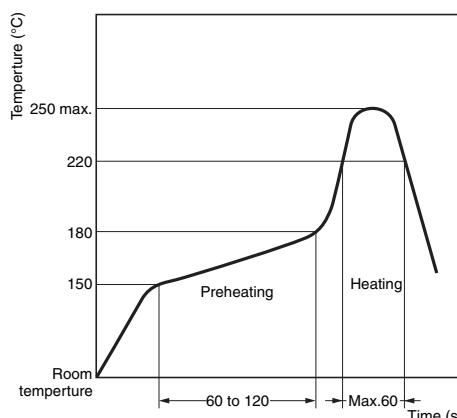

Note: The above heating curve applies if the PCB thickness is 1.6 mm.

The peak temperature may vary depending on the reflow bath used. Confirm the conditions beforehand.

Do not use an automatic soldering bath for surface-mounted Switches. The soldering gas or flux may enter the Switch and damage the Switch's plunger operation.

##### 3. Manual Soldering


Soldering temperature: 350 degC max. at the tip of the soldering iron  
Soldering time: 3 s max. for a 1.6-mm thick, single-side PCB  
Before soldering the Switch on a PCB, make sure that there is no unnecessary space between the Switch and the PCB.

#### ● Washing

This switch cannot be washed.


Doing so will cause the washing agent, together with flux or dust particles on the PCB, to enter the Switch, resulting in malfunction.

#### ● Packaging Specifications for Embossed Taping

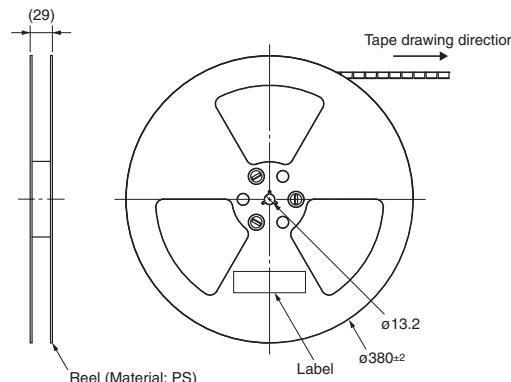


B3FS-4002P

B3FS-4005P

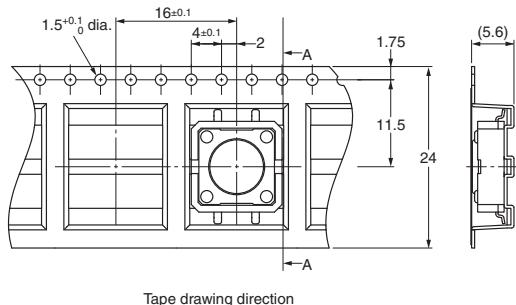

B3FS-4052P

B3FS-4055P

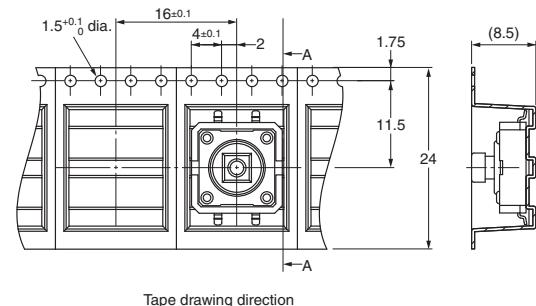

#### ● RoHS Compliant

The "RoHS Compliant" designation indicates that the listed models do not contain the six hazardous substances covered by the RoHS Directive.

##### Reference:

The following standards are used to determine compliance for the six substances.

Lead: 1,000 ppm max.

Mercury: 1,000 ppm max.

Cadmium: 100 ppm max.

Hexavalent chromium: 1,000 ppm max.

PBB: 1,000 ppm max.

PBDE: 1,000 ppm max.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**OMRON Corporation Electronic and Mechanical Components Company**

Contact: [www.omron.com/ecb](http://www.omron.com/ecb)

**OMRON ELECTRONIC COMPONENTS EUROPE B.V.**  
Wegalaan 57, 2132 JD Hoofddorp, THE NETHER LANDS  
Tel: (31)23-568-1200/Fax: 31-23-568-1212

**OMRON ELECTRONIC COMPONENTS LLC**  
55 East Commerce Drive, Suite B, IL 60173 U.S.A.  
Tel: (1)847-882-2288/Fax: 1-847-882-2192

**OMRON ELECTRONIC COMPONENTS PTE LTD.**  
438A Alexandra Road #05-05/08 Alexandra  
Technopark Singapore 119967  
TEL:(65)6376-3200/FAX:(65)6376-3211

**OMRON ELECTRONIC COMPONENTS TRADING (SHANGHAI) LTD. SHANGHAI OFFICE**  
27F Xin Mei Union Square, 999 Pudong South Road,  
Pudong New Area, Shanghai, CHINA 200120  
Tel: (86)21-6859-5919/Fax: 86-21-6859-5911

**OMRON ELECTRONIC COMPONENTS CO., LTD.**  
307, Teheran Office Bldg. #707-38,  
Yeoksam-dong, Gangnam-gu, Seoul, Korea  
Tel:(82)2-567-5020/Fax:(82)2-567-5804

**Authorized Distributor:**

© OMRON Corporation 2011 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.