



## A. Features

**IP 2 0**

- High Efficiency (Up to 87%).
- Active Power Factor Correction (Typical 0.95).
- Isolation Class II
- All-Round Protection: OVP/SCP/OTP/OPP.]
- Fully isolated metal case with IP20 and dry location.
- 1-10V, PWM, and resistance dimming function.
- Class 2 and SELV.



## B. Description

The **HEC-40/55LTA-XXTTAA** Series operate from a 90 ~ 305Vac input range. They are designed to be highly efficient and highly reliable. Features include over voltage protection, short circuit protection, and over temperature protection.

## C. Models

Output Current	Input Voltage Range Note 1	Output Voltage Range Note 4	Max. Output Power	Efficiency Note 2	Power Factor Note 2	Model Number
400mA*2	90 ~ 305Vac	24-33V	40 W	87%	0.95	HEC-40LTA-33TTAA
550mA*2	90 ~ 305Vac	24-33V	55 W	87%	0.95	HEC-55LTA-33TTAA

## D. Electronic Specifications

### - Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage (V)	90	-	305	
Input Frequency (Hz)	47		63	
Input AC Current (A)	-	-	0.6	Measured at full load and 100Vac input.
	-	-	0.3	Measured at full load and 277Vac input.
Leakage Current (mA)	-	-	0.7	At 240Vac 60Hz input.
Inrush Current (A)	-	-	150	At 220Vac input 25°C Cold Start. Duration=100μs, 10%Ipk-10%Ipk.
Inrush Current (I2t)		-	0.16 A2s	
Power Factor	0.9	-	-	At 277Vac input, full load.
THD (%)	-	20	25	





**- Output Specifications**

Parameter	Min.	Typ.	Max.	Notes
Output Current (mA)				
Io = 400 mA*2	380		420	
Io = 550 mA*2	522		558	
No Load Output Voltage (V)				
Io = 400 mA*2	-	-	50	There will be no damage or hazardous conditions occurred with no loading.
Io = 550 mA*2				
Output Ripple Voltage (V)	----	----	1 % Vomax	Measured by 20 MHz bandwidth oscilloscopes and the output paralleled a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor.
Output Voltage Overshoot (%)	-	-	110	At full load condition.
Line Regulation (%)	-	-	±3	
Load Regulation (%)	-	-	±5	
Turn-on Delay Time (s)	-	0.5	1.0	Measured at 220Vac input.

**- General Specifications**

Parameter	Min.	Typ.	Max.	Notes
Efficiency (%)				
Io = 400 mA*2			87	Measured at full load and 120Vac input.
Io = 550 mA*2				
Efficiency (%)				
Io = 400 mA*2			87	Measured at full load and 277Vac input.
Io = 550 mA*2				
MTBF (hours)	320,000	-		Measured at full load 50°C ambient temperature (MIL-HDBK-217F).
Life Time (hours)		100,000	-	Measured at rated input voltage with full load, Case temperature=60°C @ Tc point. See life time vs. Tc curve for the details.
Case Temperature (°C)	-	-	80	
Dimensions Millimeters(L × W × H)	195 × 84 × 35			





**- Protection Functions**

Parameter	Min.	Typ.	Max.	Notes
Over Voltage Protection			1.50 Vo	Hiccup mode. The power supply shall be self-recovery when the fault condition is removed.
Over Temperature Protection	The power supply shall be protected when the condition of abnormal temperature rising occurred. The power supply shall shutdown before component damage and no hazardous condition occurred.			
Short Circuit Protection	No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.			

**- Environmental Specifications**

Parameter	Min.	Typ.	Max.	Notes
Operating Temperature (°C)	-40	-	+60	Humidity: 20% RH to 80% RH; See Derating Curve for more details.
Storage Temperature (°C)	-40	-	+80	Humidity: 10% RH to 90% RH.

**- Safety and EMC Compliance**

Safety Category <small>Note 6</small>	Standard
UL/CUL	UL8750, UL1310 Class 2, CSA C22.2 NO. 223-M91 Class 2.
CE	EN 61347-1, EN61347-2-13.
EMI Standards	Notes
EN 55015	Conducted emission Test & Radiated emission Test.
EN 61000-3-2	Harmonic current emissions.
EN 61000-3-3	Voltage fluctuations & flicker.
FCC Part 15	FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 4 ANSI C63.4-2003
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 KV air discharge, 4 KV contact discharge.
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS.
EN 61000-4-4	Electrical Fast Transient / Burst-EFT: Level 2, Criteria A.
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 1 KV.
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS.
EN 61000-4-8	Power Frequency Magnetic Field Test.
EN 61000-4-11	Voltage Dips.
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment.




**Notes:**

1. Normal input voltage range 100~277Vac.
2. Measured at input 220V with a full load.
3. All specifications are typical at 25 °C unless otherwise stated.
4. Constant current operation region is preferably 75%~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.
5. Derating may be needed under low input voltages. Please check the static curve for more details.
6. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again

**E. Dimming Control**

The dimmer control is operated from an input signal (DC voltage / PWM signal / Variable Resistor). Please refer to the diagram.

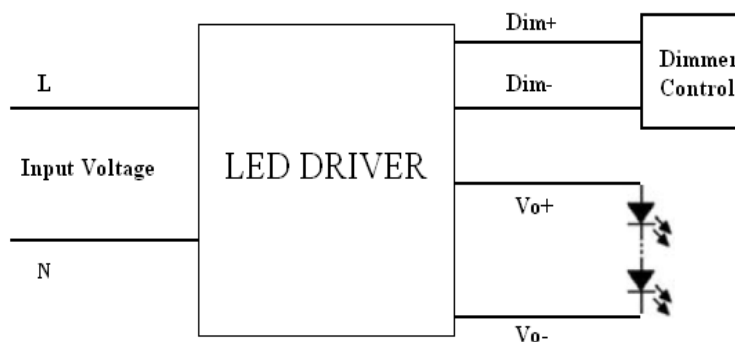

**Notes:**

1. If the dimming pin is not used, Dimming pin can be open.

Parameter	Min.	Typ.	Max.	Notes
1-10V Dimming Voltage (V)	1	-	+ 10.8	
PWM Signal	5	10	+ 10.8	
0~10KΩ Variable Resistor (Ω)	-0	-	+10K	

**- Dimming Model Output Voltage Range**

Parameter	Min.	Typ.	Max.	Notes
$I_o = 400 \text{ mA} \times 2$	24	-	33	Measured at 100-277Vac input.






High Quality  
Evolution  
Commitment


**HEC-40/55LTA-33TTAA Rev A**

$I_o = 550 \text{ mA}^*2$	24	-	33	Measured at 100-277Vac input.
---------------------------	----	---	----	-------------------------------

### - DC Voltage Dimming Curve

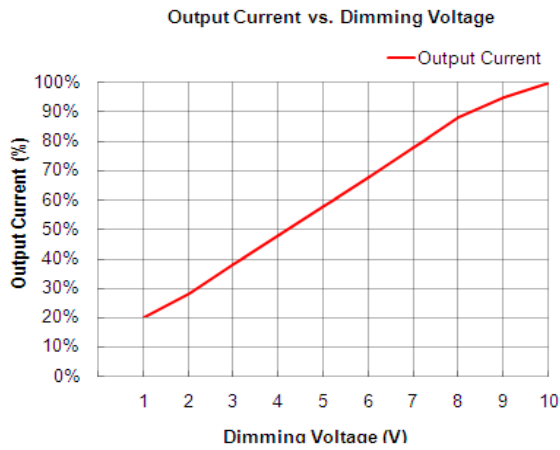

### - PWM Signal Dimming Curve

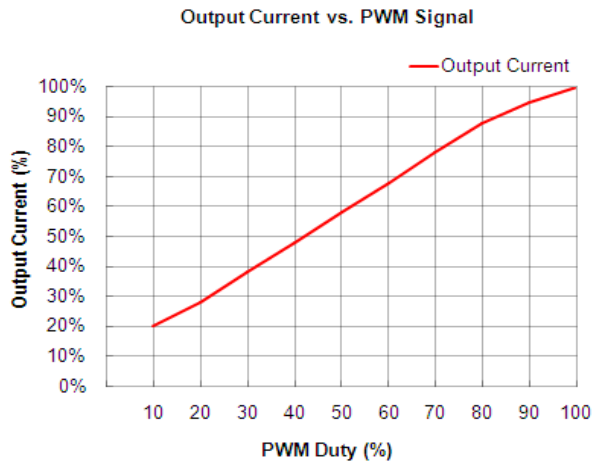

### - Variable Resistor Curve



<http://www.hec-group.com.tw/>  
[service@hec-group.com.tw](mailto:service@hec-group.com.tw)


TEL:+886-6-356-0606  
FAX:+886-6-356-0505



High Quality  
Evolution  
Commitment

HEC-40/55LTA-33TTAA Rev A


Output Current vs. Variable Resistor

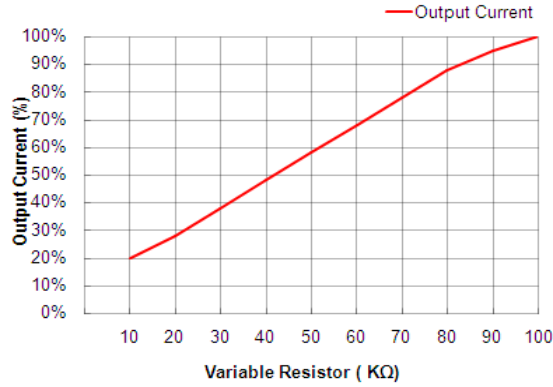

## F. Electronic Curve


### - Derating Curve

Derating Curve

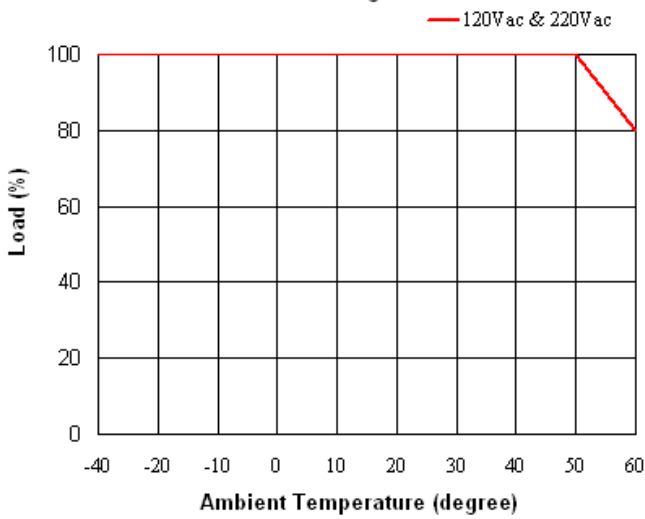

### - Static Curve

Static Curve

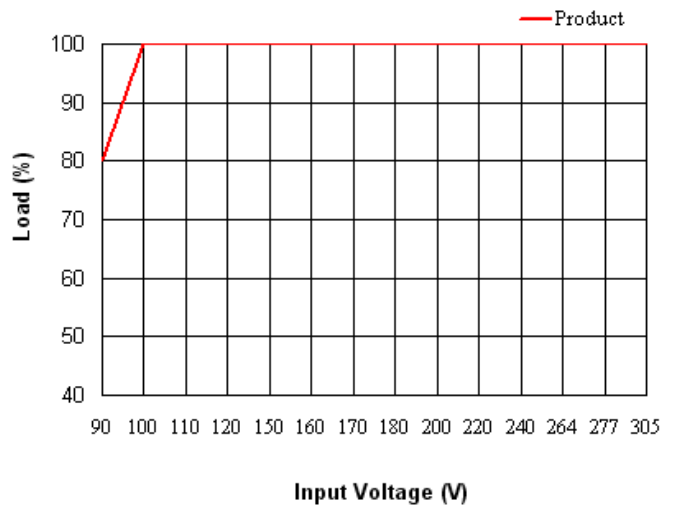


<http://www.hec-group.com.tw/>  
[service@hec-group.com.tw](mailto:service@hec-group.com.tw)


TEL:+886-6-356-0606  
FAX:+886-6-356-0505




### - Power Factor Characteristics Curve

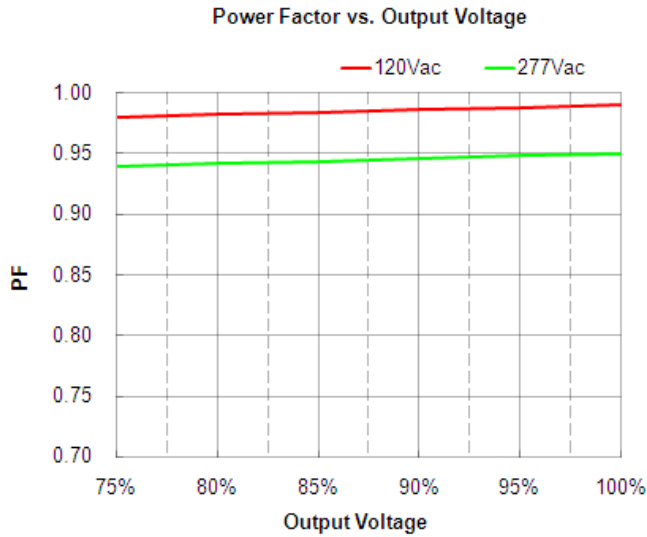

### - Efficiency Characteristics Curve

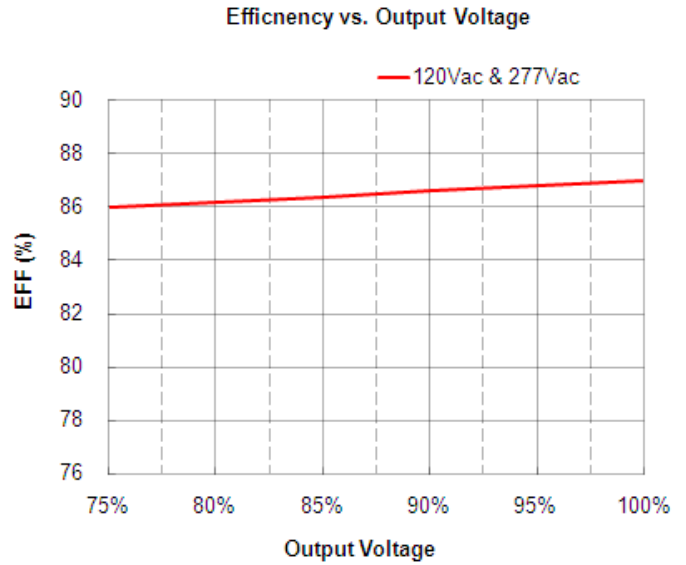

### - Life Time vs. Case Temperature Curve

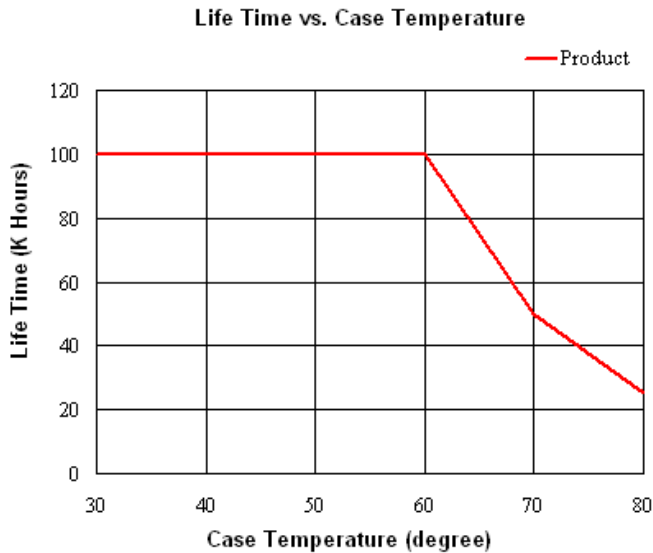

## G. Mechanical Outline






High Quality  
Evolution  
Commitment



**HEC-40/55LTA-33TTAA Rev A**

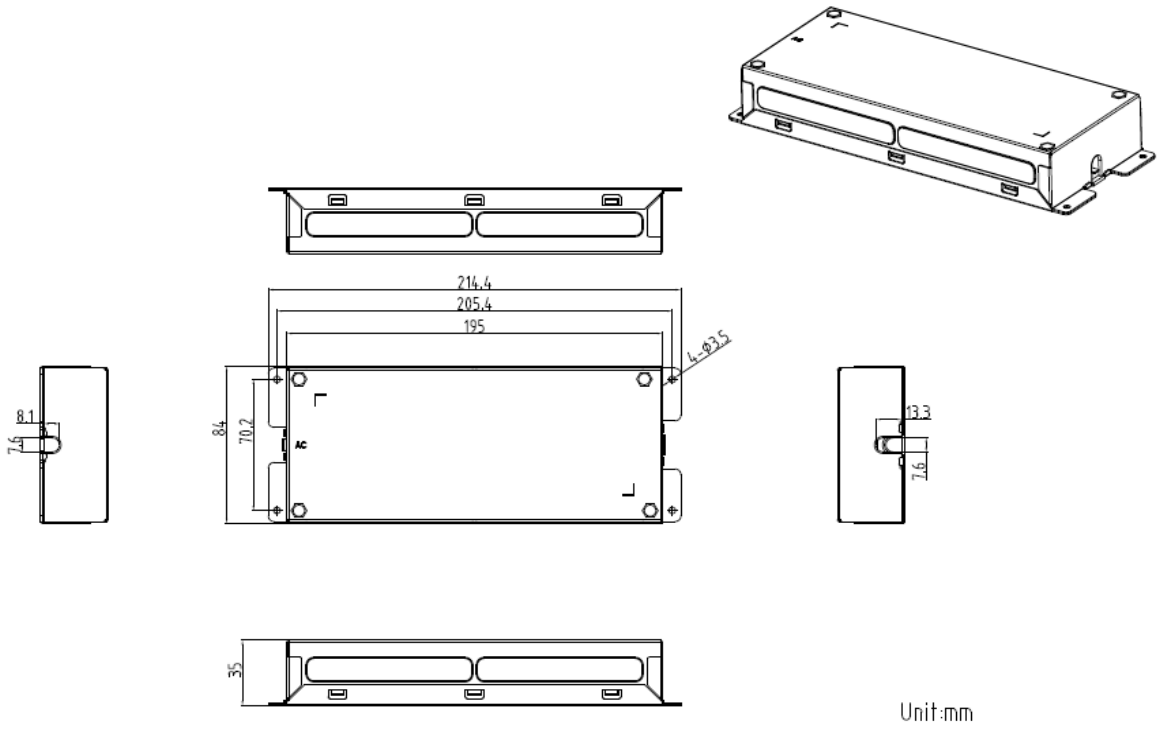

## H. RoHS Compliance Outline

Our products comply with the European Directive 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

## I. Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2014-09-01	A	Datasheets Release	/	/



<http://www.hec-group.com.tw/>  
[service@hec-group.com.tw](mailto:service@hec-group.com.tw)

TEL:+886-6-356-0606  
FAX:+886-6-356-0505