

Metallized Polypropylene (PP) - Capacitors for Hybrid Drives

Special Features

- Very high volume/capacitance ratio
- Self-healing, internal safety disconnecter
- Safe contact configuration by screwable plates
- Dry construction without electrolyte or oil
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2011/65/EU
- Customer-specific capacitances or voltages on request

Typical Applications

As intermediate circuit capacitor e.g. in hybrid drives

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

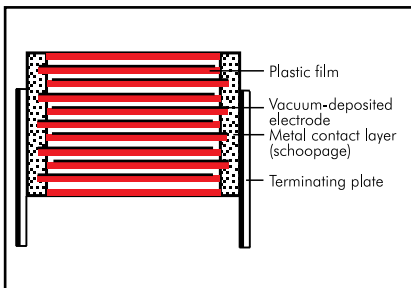

Encapsulation:

Solvent-resistant, flame-retardant plastic case with PU seal, UL 94 V-0

Terminations:

Tinned plates

Marking:

Colour: Black. Marking: Gold.

Electrical Data

Capacitance range:

500 μ F

Rated voltage:

450 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, ($\pm 5\%$ available subject to special enquiry)

Operating temperature range:

-55° C to $+85^{\circ}$ C (hot spot $\leq +110^{\circ}$ C in combination with a heatsink)

Insulation resistance at $+20^{\circ}$ C:

$\geq 10\,000$ sec ($M\Omega \times \mu$ F)

(mean value: 50 000 s)

Measuring voltage: 100 V/1 min.

Dielectric loss factor $\tan \delta_0$: 2×10^{-4}

Test voltage: $1.3 U_r$, 2sec

Dielectric absorption: 0.05 %

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from $+85^{\circ}$ C for DC voltage.

Reliability:

Operational life > 100 000 hours at 40° C

Failure rate < 36 fit ($0.75 \times U_r$ and 40° C)


Mounting Recommendation

Excessive mechanical strain, e.g. pressure or shock onto the capacitor body, is to be avoided during mounting and usage of the capacitors. When fixing the capacitor the screw torque is to be limited to max. 5 Nm.

Packing

Transport-safe packing in cardboard boxes.

For further details and graphs please refer to Technical Information.

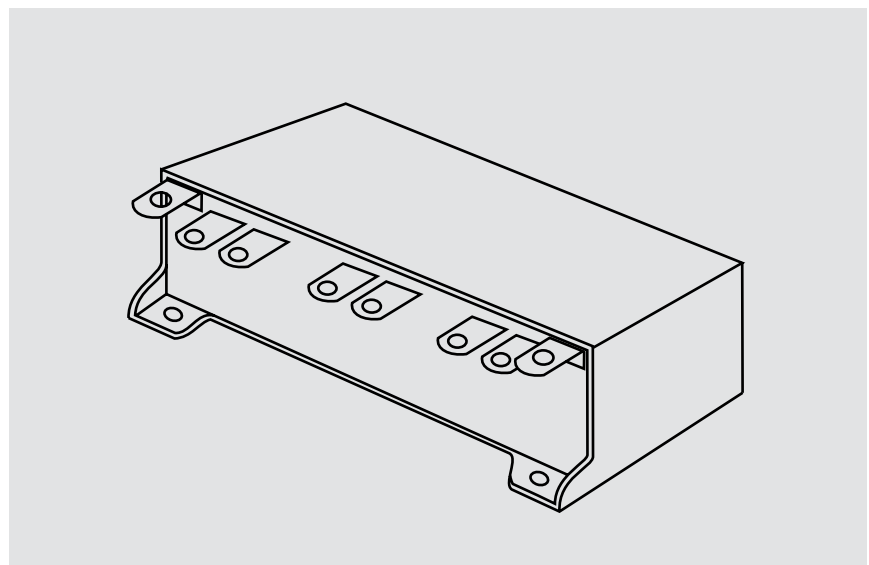

Continuation

General Data

Capacitance	U_R	I_{max} A	I_{rms}^* A	L_e nH	ESR* m Ω	Approx. weight g	Part number
500 μ F	450 VDC	5000	120**	< 15	0.8**	1400	DCHYH06500JG00_-----



* $f = 1\text{ kHz}$

Customized solutions can be realized on request

** General guide

Part number completion:

Tolerance: 20 % = M
 10 % = K
 5 % = J
 Packing: bulk = S
 Pin length: none = 00

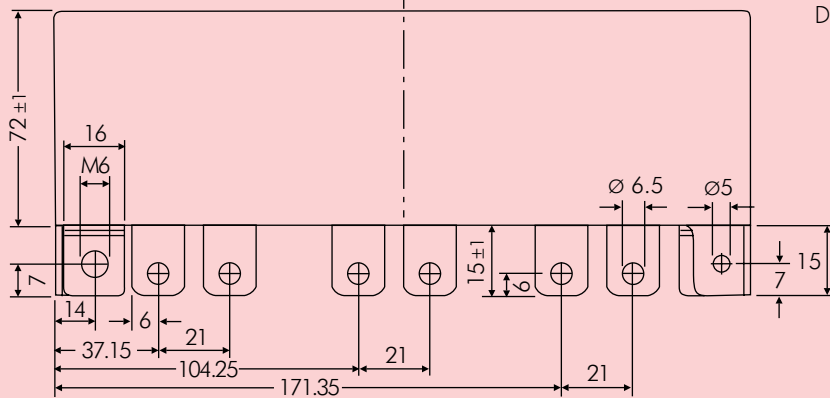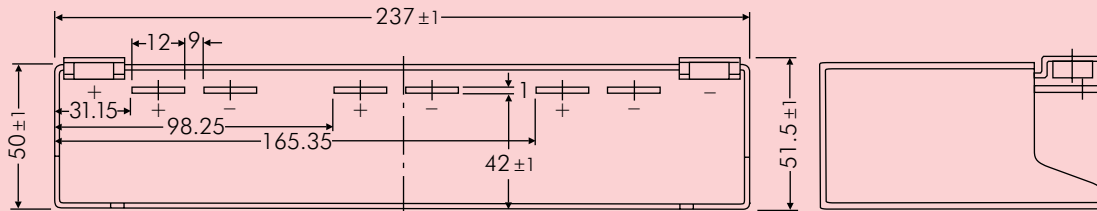

Rights reserved to amend design data without prior notification.



WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6-2		
Type description:				Rated voltage:		Capacitance:			Size:		Tolerance:		Packing:				
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022			4.8x3.3x3 Size 1812 = KA		±20% = M		AMMO H16.5 340x340 = A AMMO H16.5 490x370 = B AMMO H18.5 340x340 = C AMMO H18.5 490x370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk/TPS Standard = S ...				
SMD-PPS = SMDI				63 VDC = C0		47 pF = 0047			4.8x3.3x4 Size 1812 = KB		±10% = K						
FKP 02 = FKP0				100 VDC = D0		100 pF = 0100			5.7x5.1x3.5 Size 2220 = QA		±5% = J						
MKS 02 = MKS0				250 VDC = F0		150 pF = 0150			5.7x5.1x4.5 Size 2220 = QB		±2.5% = H						
FKS 2 = FKS2				400 VDC = G0		220 pF = 0220			7.2x6.1x3 Size 2824 = TA		±1% = E						
FKP 2 = FKP2				450 VDC = H0		330 pF = 0330			7.2x6.1x5 Size 2824 = TB		...						
MKS 2 = MKS2				600 VDC = I0		470 pF = 0470			10.2x7.6x5 Size 4030 = VA								
MKP 2 = MKP2				630 VDC = J0		680 pF = 0680			12.7x10.2x6 Size 5040 = XA								
FKS 3 = FKS3				700 VDC = K0		1000 pF = 1100			15.3x13.7x7 Size 6054 = YA								
FKP 3 = FKP3				800 VDC = L0		1500 pF = 1150			2.5x7x4.6 PCM 2.5 = 0B								
MKS 4 = MKS4				850 VDC = M0		2200 pF = 1220			3x7.5x4.6 PCM 2.5 = 0C								
MKP 4 = MKP4				900 VDC = N0		3300 pF = 1330			2.5x6.5x7.2 PCM 5 = 1A								
MKP 10 = MKP1				1000 VDC = O1		4700 pF = 1470			3x7.5x7.2 PCM 5 = 1B								
FKP 4 = FKP4				1100 VDC = P0		6800 pF = 1680			2.5x7x10 PCM 7.5 = 2A								
FKP 1 = FKP1				1200 VDC = Q0		0.01 µF = 2100			3x8.5x10 PCM 7.5 = 2B								
MKP-X2 = MKX2				1250 VDC = R0		0.022 µF = 2220			3x9x13 PCM 10 = 3A								
MKP-X2 R = MKXR				1500 VDC = S0		0.047 µF = 2470			4x9x13 PCM 10 = 3C								
MKP-Y2 = MKY2				1600 VDC = T0		0.1 µF = 3100			5x11x18 PCM 15 = 4B								
MP 3-X2 = MPX2				2000 VDC = U0		0.22 µF = 3220			6x12.5x18 PCM 15 = 4C								
MP 3-X1 = MPX1				2500 VDC = V0		0.47 µF = 3470			5x14x26.5 PCM 22.5 = 5A								
MP 3-Y2 = MPY2				3000 VDC = W0		1 µF = 4100			6x15x26.5 PCM 22.5 = 5B								
MP 3R-Y2 = MPRY				4000 VDC = X0		2.2 µF = 4220			9x19x31.5 PCM 27.5 = 6A								
Snubber MKP = SNMP				6000 VDC = Y0		4.7 µF = 4470			11x21x31.5 PCM 27.5 = 6B								
Snubber FKP = SNFP				250 VAC = 0W		10 µF = 5100			9x19x41.5 PCM 37.5 = 7A								
GTO MKP = GTOM				275 VAC = 1W		22 µF = 5220			11x22x41.5 PCM 37.5 = 7B								
DC-LINK MKP 3 = DCP3				300 VAC = 2W		47 µF = 5470			94x49x182 DCH_ = H0								
DC-LINK MKP 4 = DCP4				400 VAC = 3W		100 µF = 6100			94x77x182 DCH_ = H1								
DC-LINK MKP 4S = DCPS				440 VAC = 4W		220 µF = 6220			...								
DC-LINK MKP 5 = DCP5				500 VAC = 5W		1000 µF = 7100			...								
DC-LINK MKP 6 = DCP6											
DC-LINK HC = DCH_									Version code:		Pin length (untaped)						
DC-LINK HY = DCHY									Standard = 00		3.5 ±0.5 = C9						
									Version A1 = 1A		6-2 = SD						
									Version A1.1.1 = 1B		16 ±1 = P1						
									Version A2 = 2A		...						
									...								

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.