

MHC CONTACTS





Smiths Connectors' High Frequency Coax Contacts (MHC) offer exceptional RF performance up to 26.5 GHz for Size 8 and 40 GHz for Size 12 contacts in multi-pin connector applications. Engineered with a "float mount" design, these contacts ensure low VSWR at microwave frequencies by preventing air gaps at the mating interface. These contacts are designed to be terminated to .086 diameter flexible cables (RG-405 equivalent).

MHC CONTACT FEATURES:

- ▶ Fits size 8 and 12 cavities for MIL-DTL-38999, ARINC 404 and ARINC 600
- ▶ Fits Size 8 cavity for MIL-DTL-24308 D-Sub
- ▶ Spring loaded for optimum contact mating force
- ▶ High frequency performance
- ▶ Low VSWR
 - Size 8: 1.15:1 Typ Mated Pair (DC to 26.5 GHz)
 - Size 12: 1.25:1 Typ Mated Pair (DC to 26.5 GHz)
1.5:1 Typ Mated Pair (26.5 - 40 GHz)
- ▶ Insertion Loss:
 - 0.15 dB to 26.5 GHz Typ (Size 8)
 - 0.2 dB to 40 GHz Typ (Size 12)
- ▶ Socket contacts are spring loaded float mount for superior RF performance and reliability

ELECTRICAL SPECIFICATIONS (MIL-DTL-38999/ARINC 404/ARINC 600)	
Impedance	50 Ohms
Frequency Range	DC to 26.5 GHz (Size 8) DC to 40 GHz (Size 12)
VSWR	1.15:1 Typ (Size 8) to 26.5 GHz 1.25:1 Typ (Size 12) to 26.5 GHz 1.50:1 Typ (Size 12) to 40 GHz (mated pair)
DWV	500 VRMS @ Sea Level (Size 8) 325 VRMS @ Sea Level (Size 12)
Temperature Range	-65°C to +165°C
MATERIALS & FINISHES	
Center & Outer Spring Contacts	Brass per ASTM-B16, alloy UNS C36000 or BeCu per ASTM-B196, alloy UNS C17200, C17300 Gold plate per MIL-DTL-45204, Type II, Class 1
Shell	Brass per ASTM-B16, alloy UNS C36000 Gold plate per MIL-DTL-45204, Type II, Class 1
Hood	305 CRES per ASTM-A240, passivated per ASTM-A967
Insulators	PTFE per ASTM D-170


All specifications subject to change without notice.

MHC SAMPLE INSERT ARRANGEMENTS


Consult Factory For:

- Custom or Special Insert Arrangements
- Connector Ordering Information
- PC Tail Versions of Contacts


MIL-DTL-38999

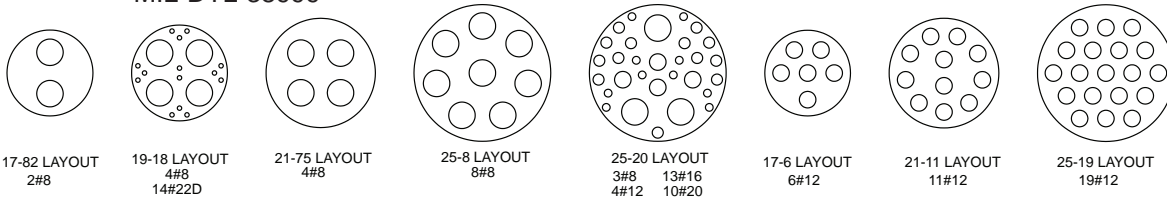


ARINC 600

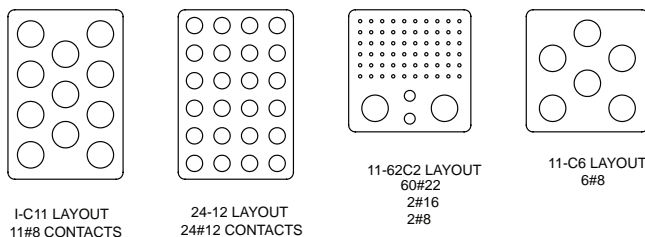

MIL-DTL-24308

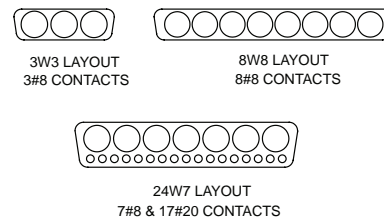


ARINC 404

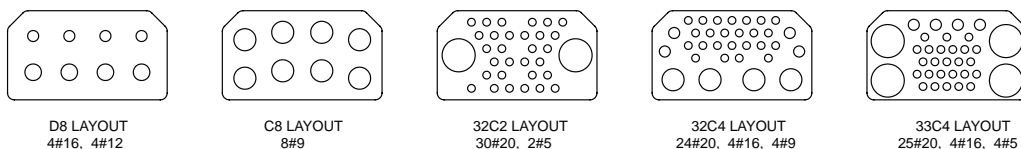


Smiths Connectors provides specialty, enhanced performance connectors and cable assemblies and as such does not currently offer circular, rack and panel, or D-subminiature connectors that are listed on military standard Qualified Products Lists (QPL) per applicable detail specification sheets. Smiths Connectors' connectors are fully intermateable with applicable QPL products and meet the applicable requirements of all military standards listed in this catalog.

▶ SIZE 12 PIN FOR MIL-DTL-38999

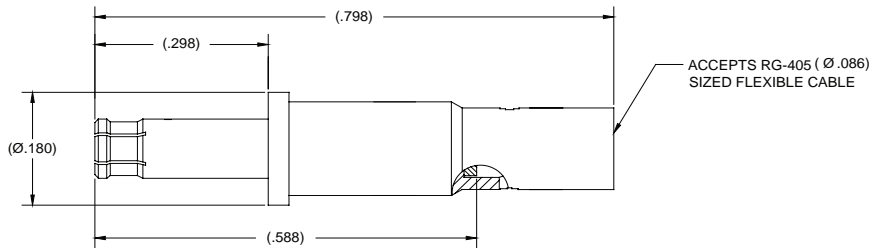


PART NUMBER	CABLE SIZE
018624-8002	.086 Flex

▶ SIZE 8 PIN FOR MIL-DTL-38999

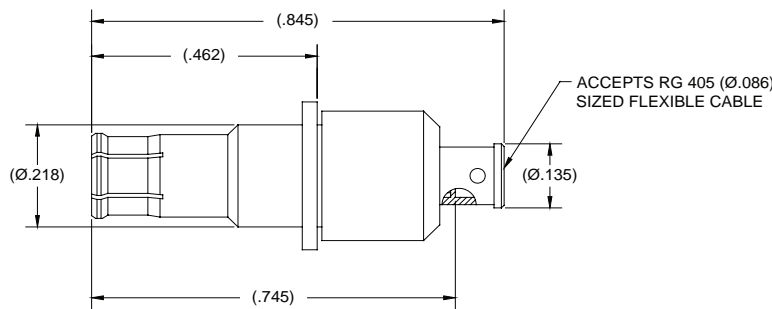


PART NUMBER	CABLE SIZE
019624-2011	.086 Flex
019624-2012	.141 Flex

▶ SIZE 12 PIN CONTACT FOR ARINC 404 AND ARINC 600

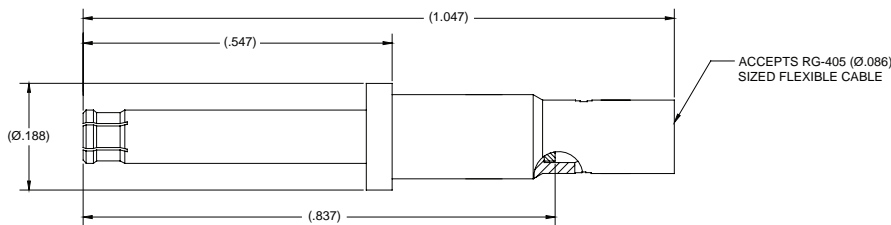


PART NUMBER	CABLE SIZE
018624-8004	.086 Flex

▶ SIZE 8 PIN CONTACT FOR ARINC 404 AND ARINC 600

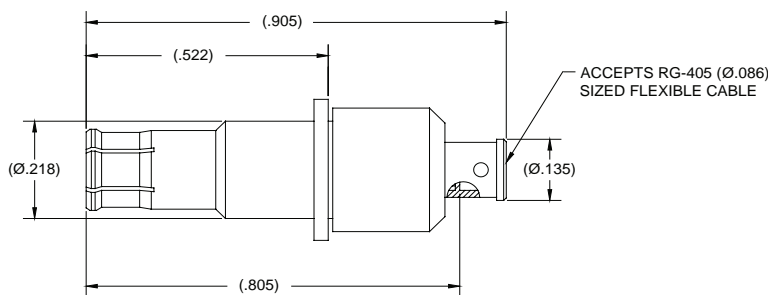


PART NUMBER	CABLE SIZE
019624-2014	.086 Flex

▶ SIZE 8 PIN FOR MIL-DTL-24308

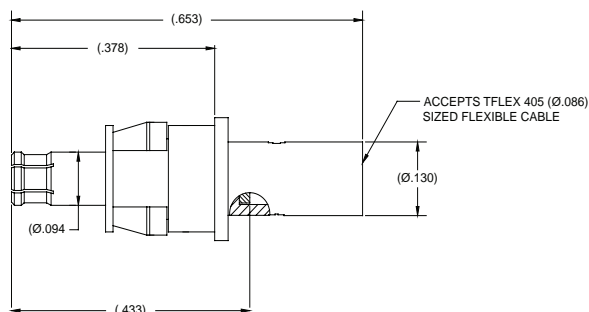


PART NUMBER	CABLE SIZE
019829-2000	.086 Flex

▶ **SIZE 12 SOCKET CONTACT FOR MIL-DTL-38999**

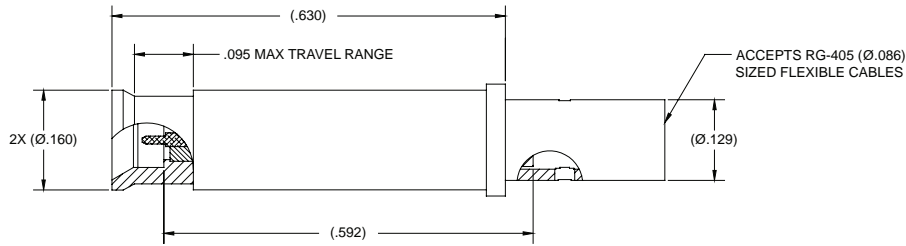


PART NUMBER	CABLE SIZE
018724-8002	.086 Flex

▶ **SIZE 8 SOCKET FOR MIL-DTL-38999**

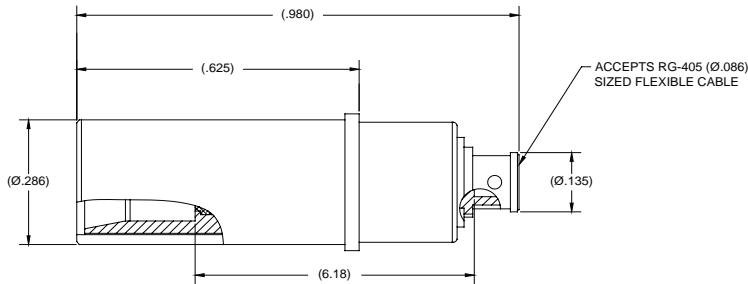


PART NUMBER	CABLE SIZE
019524-2011	.086 Flex
019524-2012	.141 Flex

▶ **SIZE 12 SOCKET CONTACT FOR ARINC 404 AND ARINC 600**

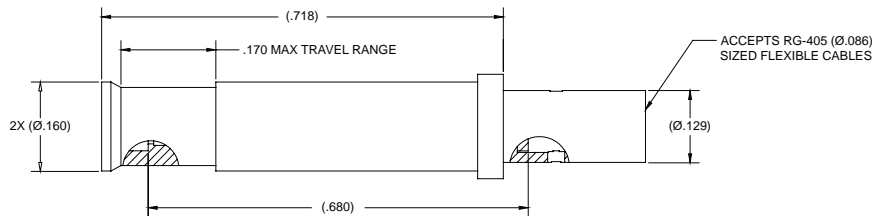


PART NUMBER	CABLE SIZE
018724-8004	.086 Flex

▶ **SIZE 8 SOCKET CONTACT FOR ARINC 404 AND ARINC 600**

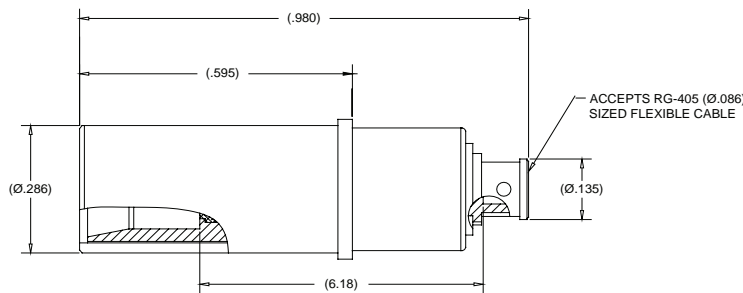

PART NUMBER	CABLE SIZE
019524-2014	.086 Flex

▶ **SIZE 8 SOCKET FOR MIL-DTL-24308**

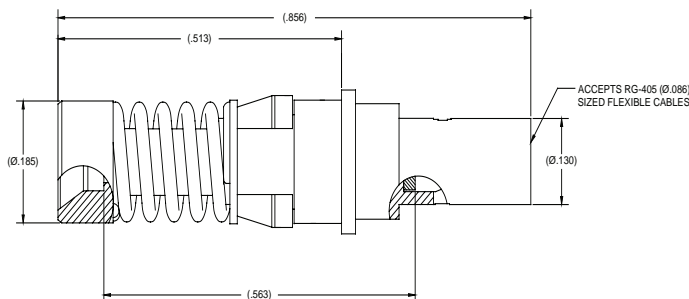

PART NUMBER	CABLE SIZE
019729-2000	.086 Flex

HOW TO ORDER



1 ▶ CONNECTOR #1

2 ▶ CABLE GROUP #

Semi-Rigid Coax

27 = SR.047

28 = SR.086

29 = .141.Flex

30 = .086 Flex

Flexible Coax


31 = RG-178

32 = RG-316

36 = RG-58

3 ▶ CONNECTOR #2 OL for Open Lead

4 ▶ CABLE LENGTH IN INCHES (XXX)



SEMI-RIGID COAX CABLES				
CABLE GROUP	CABLE DESIGNATION	IMPEDANCE (OHMS)	JACKET	INNER CONDUCTOR
27	SR.047	50	0.047"	0.0362"
28	SR.086	50	0.0865"	0.0201"



FLEXIBLE COAX CABLES				
CABLE GROUP	CABLE DESIGNATION	IMPEDANCE (OHMS)	JACKET	INNER CONDUCTOR
29	.141 Flex	50	0.160"	0.036"
30	.086 Flex	50	0.104"	0.020"
31	RG-178	50	0.071"	0.012"
32	RG-316	50	0.098"	0.0201"
33	RG-58	50	0.195"	0.0355"



SMITHS CONNECTORS

GLOBAL SUPPORT

AMERICAS

info.us@smithsconnectors.com

Costa Mesa, CA

1.714.371.1100

Hudson, MA

1.978.568.0451

Kansas City, KS

1.913.342.5544

EUROPE

France

33.2.3296.9176

info.fr@smithsconnectors.com

Germany

49.991.250.120

info.de@smithsconnectors.com

Italy

39.10.60361

info.it@smithsconnectors.com

United Kingdom

44.208.236.2400

info.uk@smithsconnectors.com

ASIA

asiainfo@smithsconnectors.com

Shanghai, China

86.21.3318.4650

Suzhou, China

86.512.6273.1188

Singapore

65.6846.1655

visit us at | smithsconnectors.com |     